## **General Air-cooled Laser welder**

The A series Reci Air-cooled Laser welder's Laser device is independently developed and produced by Reci. Compared with traditional laser devices, it has better wall-plug efficiency and superior beam quality,

meanwhile, due to the coilability of optical fiber & the structure of fiber laser is more compact. The Reci air-cooled laser welder has the

advantages of Wall-plug efficiency, high output power, superior beam quality, compact structure, maintenance-free, and low cost, and can be widely used in metal processing related fields like Industrial processing, military and national defense, scientific research and other scenarios

|                              | Model  | A80                              | A120            | A150            |  |  |
|------------------------------|--|----------------------------------|-----------------|-----------------|--|--|
|                              | Limit Power  | 700W                             | 1000W           | 1300W           |  |  |
|                              | Maximum Power  | 800W                             | 1200W           | 1500W           |  |  |
|                              | Operating Mode   | Continuous/spot welding          |                 |                 |  |  |
| 0                            | Polarization Direction                                 | Random                           |                 |                 |  |  |
| ptical                       | Output Power Adjustment Range                          | 10~100%                          |                 |                 |  |  |
| Spec                         | Central Wavelength                                     | 1080±3nm                         |                 |                 |  |  |
| Optical Specifications       | Power attenuation after 1 hour of continuous operation | <2%                              |                 |                 |  |  |
| ns                           | Maximum Modulation Frequency                           | 5Khz                             |                 |                 |  |  |
|                              | Indicating Red Light Power                             | ≥0.2mW                           |                 |                 |  |  |
|                              | Output Fiber Core Diameter                             | 20μm                             |                 |                 |  |  |
|                              | Output Armored Cable Length                            | Default 5m                       |                 |                 |  |  |
| electrical<br>Specifications | Operating Voltage                                      | AC 220v , Single Phase , 50/60Hz |                 |                 |  |  |
| trical                       | Maximum Power Consumption (W)                          | <2100W                           | <3100W          | <4100W          |  |  |
| tions                        | Control Method   | Touch Screen                     |                 |                 |  |  |
|                              | Dimension (W × H X D) mm                               | 273×614.9×396.3                  | 273×634.9×527.7 | 273×634.1×527.7 |  |  |
| Othe                         | Weight   | 34kg                             | 41kg            | 43kg            |  |  |
| er Spe                       | Operating Temperature                                  | -30~40°C                         |                 |                 |  |  |
| cific                        | Operating humidity                                     | <90%                             |                 |                 |  |  |
| Other Specifications         | Cooling  | Air                              |                 |                 |  |  |
|                              | Stored Temperature                                     | -10~60°C                         |                 |                 |  |  |
|                              | Gas Pressure   | ≤0.7MPa                          |                 |                 |  |  |
| Accessories                  | Welding Gun  | Default                          |                 |                 |  |  |
|                              | Wire Feeder  | Default                          |                 |                 |  |  |

reci 06





## **Industrial Air-cooled Laser welder**

The A series Reci Air-cooled Laser welder's Laser device is independently developed and produced by Reci. Compared with traditional laser devices, it has better wall-plug efficiency and superior beam quality,

meanwhile, due to the coilability of optical fiber & the structure of fiber laser is more compact. The Reci air-cooled laser welder has the

advantages of Wall-plug efficiency, high output power, superior beam quality, compact structure, maintenance-free, and low cost, and can be widely used in metal processing related fields like Industrial processing, military and national defense, scientific research and other scenarios

|                        | Model  | A200                             | A320                            |  |  |  |
|------------------------|--|----------------------------------|---------------------------------|--|--|--|
|                        | Limit Power  | 1800W                            | 3000W                           |  |  |  |
|                        | Maximum Power  | 2000W                            | 3200W                           |  |  |  |
|                        | Operating Mode   | Continuous/spot welding          |                                 |  |  |  |
| 0                      | Polarization Direction                                 | Random                           |                                 |  |  |  |
| prical                 | Output Power Adjustment Range                          | 10~100%                          |                                 |  |  |  |
| Spec                   | Central Wavelength                                     | 1080±3nm                         |                                 |  |  |  |
| Optical Specifications | Power attenuation after 1 hour of continuous operation | <2%                              |                                 |  |  |  |
| 2                      | Maximum Modulation Frequency                           | 5Khz                             |                                 |  |  |  |
|                        | Indicating Red Light Power                             | ≥0.2mW                           |                                 |  |  |  |
|                        | Output Fiber Core Diameter                             | 20μm                             | 25µm                            |  |  |  |
|                        | Output Armored Cable Length                            | Default 5m                       |                                 |  |  |  |
| electrical             | Operating Voltage                                      | AC 220v , single-phase , 50/60Hz | AC 380V , Three-phase , 50/60HZ |  |  |  |
| trical                 | Maximum Power Consumption (W)                          | <6000W                           | <9000W                          |  |  |  |
|                        | Control Method   | Touch Screen                     |                                 |  |  |  |
|                        | Dimension (W × H X D ) mm                              | 323×684.2×629                    | 373×877.2×758                   |  |  |  |
| 2                      | Weight   | 58kg                             | 90kg                            |  |  |  |
| Other Specifications   | Operating Temperature                                  | -30~40 °C                        |                                 |  |  |  |
| pecifi                 | Operating humidity                                     | <90%                             |                                 |  |  |  |
| Catio                  | Cooling  | Air                              |                                 |  |  |  |
| 2                      | Stored Temperature                                     | -10~60°C                         |                                 |  |  |  |
|                        | Gas Pressure   | ≤0.7MPa                          |                                 |  |  |  |
| Acces                  | Welding Gun  | Default                          |                                 |  |  |  |
| Accessories            | Wire Feeder  | Default                          |                                 |  |  |  |

reci 08





## **Product Features**

## **Efficient** Cooling




Air cooling structure, high-efficiency turbofan

Quiet, Embedded turbofan,
Multi-level speed change, Low
noise during operation










Welder and wire feeder in one




High Energy Consumption



High reliability and high environmental adaptability, Can work continuously for 24 hours in an environment from -20 degrees to +40 degrees

reci

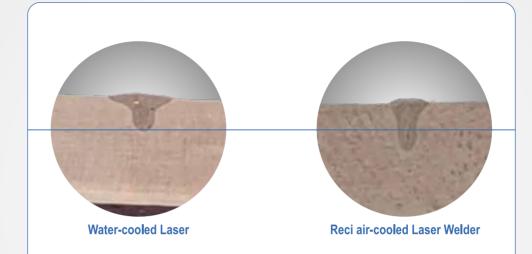



Deep Welding, using 14um YDF It is 1.5-2.0 times the welding depth of water-cooled laser welder with the same power.

#### **Welding Depth Data Summary**

Welding conditions: No wire feeding Welding Speed is about 10mm/s

| Water-c | ooled Lase    | r Welder | Reci Air-cooled Laser Welder |               |       |               |
|---------|---------------|----------|------------------------------|---------------|-------|---------------|
| Power   | Welding Depth |          | Power                        | Welding Depth |       | Difference in |
|         | Min           | Max      |                              | Min           | Max   | Welding Depth |
| 620     | 0.865         | 0.895    | 655                          | 2.190         | 2.321 | 1.325~1.426   |
| 940     | 1.967         | 2.077    | 995                          | 2.750         | 2.979 | 0.783~0.902   |
| 1250    | 2.618         | 2.732    | 1299                         | 5.404         | 5.617 | 2.786~2.885   |
| 1750    | 3.437         | 3.613    | 1782                         | 6.936         | 7.02  | 3.499~3.407   |

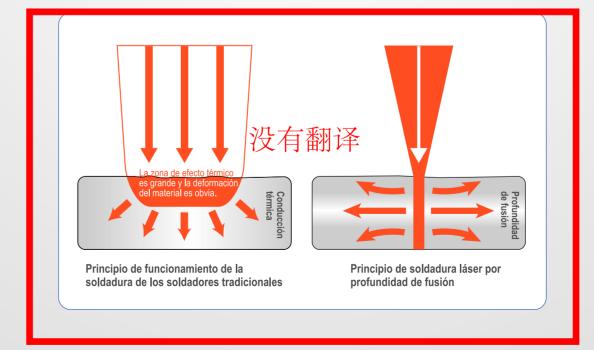

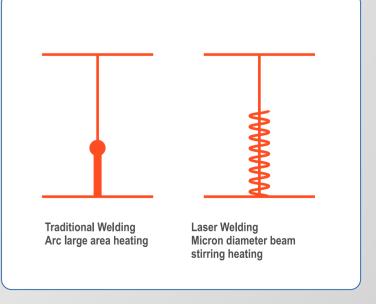

<sup>11</sup> reci

# Reci Air-cooled Laser Welder/Traditional Welder/Water-cooled Laser Welder/Other Brand Welder

| Item                           | Traditional Welder                               | Soldador láser refrigerado por aire de Reci  | Water-cooled Laser Welder   | Other Brand Welder                                   |
|--------------------------------|--|--|---|--|
| Welding Speed                  | Slow   | Rápido, 6 veces más eficiente<br>que las máquinas tradicionales  | -   | -  |
| Operability                    | Complex operation ,<br>High demands on operators | Fácil de operar sin<br>pedir experiencia   | *   | -  |
| Safety                         | Easy to produce strong light and harmful gas     | sin factores nocivos   | •   | -  |
| Deformation                    | Easy to produce deformation<br>and blisters etc  | El efecto térmico es<br>pequeño y casi invisible   | Thermal impact is smaller than traditional welding machines   | -  |
| Secondary Processing           | Require secondary processing                     | No es necesario procesar   | <u> </u>  |  |
| Power Consumption              | Set as 100%                                      | Saving 25% power than<br>Traditional Welder  | Consuming more 25% than Traditional Welder  |  |
| Wall-Plug<br>Efficiency        | ž.   | ≥ 38%  | ≥25%  | *  |
| Weight                         | •  | A80 30kg   | More than 60kg<br>(including compressor)  |  |
| Dimension                      | •  | 0.0915m3   | 0.2m³   | Ä  |
|                                |  | 5.617  | 2.732   |  |
| Welding Depth                  | ₹  | Reci Air-cooled Lase<br>1.5-2 times than W   | -   |  |
| Cost                           | =  | Compared with water-cooled laser welding machine, it saves electricity cost, Saving cost of one and half years almost can buy a new Reci air-cooled laser Welder | The compressor consumes more electricity, it requires to add refrigerant every year, Water tank also needs mantenance | -  |
| Weight (including wire feeder) | ·  | A80 40kg   | Not integrated with wire feeder   | •  |
| Continuous<br>Working Time     | -  | Sustainable work   | Sustainable work  | Not sustainable, it has to<br>stop once every minute |
| Operating temperature          | -  | - 30°C to 40°C   | 1 °C to +40°C if water freezed,<br>the water tank will break  | - 1 0°C to +30°C                                     |
| Maintenance cost               | •  | Clean the filter and replace the protective Lens   | Clean the filter and replace the protective Lens Adding refrigerant Adding Water Adding antifreeze                    | <u>.</u>   |

reci 12

- . It is 7 times more efficient than traditional argon arc welder
- . 14 micron core diameter optical fiber output, fundamental mode light spot, good beam quality
- . The welding depth is 1.5 times that of other water-cooled lasers with the same power
- . High Wall-Plug Efficiency, The Wall-Plug Efficiency of whole machine is 38%
- . Purely air-cooled compact structure design, can work in -30 C ~+40 C environment
- . High reliability, service life is more than 6 years, low mantenance cost
- . Saving Power, Compared with water-cooled laser welding machine, it saves electricity cost, Saving cost of one and half years almost can buy a new Reci air-cooled laser Welder

For example: A150 model, with wire feeder, Right angle welding 3mm stainless steel plate, under 35% laser power, the Power comsumption is 1 kWh/1 hour.





### **Case Studies**







Transportation



**Electrical Appliances** 



Advertisement



Automobile



Hardware-Door and Window Welding



Hardware-Aluminum Alloy

## Typical customers

Automobile

Dofeng Motor, ChangHe

Power

State Grid

**R&D** and Schools

Southern University of Science and Technology, ShangHai Institute of Laser Technology

lachine Made


SANY, LEO

Ship


**BoYang Ship** 

reci 14

## **Welding Skills**



Aluminum Plate-3.0mm Lap welding



Stainless steel-3.0mm T-type welding



galvanized sheet-3.0mm T-type welding



Aluminum-4.0mm T-type welding



Carbon Steel-4.0mm T-type welding

